


环保物料

Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 7A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -40°C~+120°C

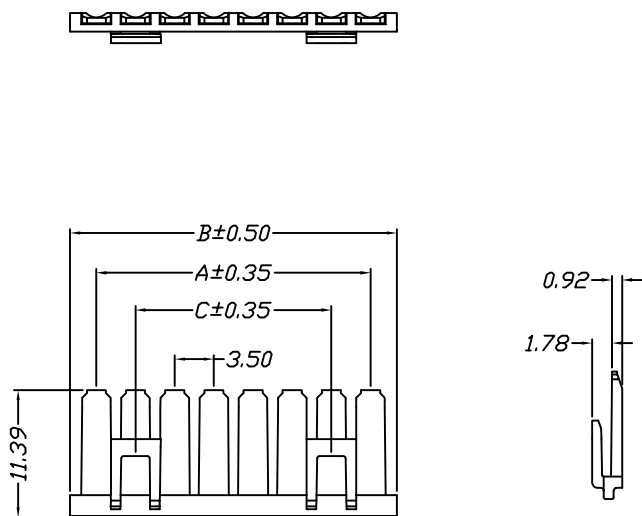

| Part No | Dimensions | | |
|--------------|------------|-------|-------|
| | A | B | C |
| 2P | 3.50 | 8.20 | 3.50 |
| 3P | 7.00 | 11.70 | 3.50 |
| 4P | 10.50 | 15.20 | 3.50 |
| 5P | 14.00 | 18.70 | 3.50 |
| 6P | 17.50 | 22.20 | 17.50 |
| 7P | 21.00 | 25.70 | 17.50 |
| 8P | 24.50 | 29.20 | 17.50 |
| Material | | Color | |
| PA66,UL94V-0 | | Black | |

| GENERAL TOLERANCES | | SCALE: | NAME | DATE | 康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827 | PART. NO: 43501B00-NP*-66 |
|--------------------|-----------------|-----------|----------|------------|--|---------------------------------|
| LINEAR | ANGLES | 1:1 | APPROVED | | | |
| 0.0±0.35 | X° REF±6° | | DESIGNER | | | |
| 0.00±0.25 | X° ±3° | | DRAWN | 肖坤权 | | |
| AO | 新图面发行 | 2018.7.28 | UNIT: MM | 0.00±0.25 | X° ±3° | TITLE: 3.50mm pitch Retainer |
| REV. | REVISION RECORD | DATE | SIZE: A4 | 0.000±0.15 | X° X'±2° | REV: AO SHEET: 1/1 |