

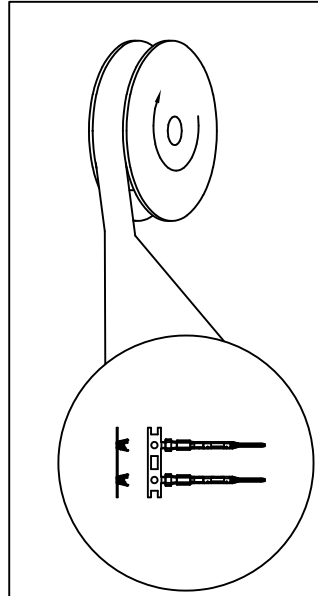
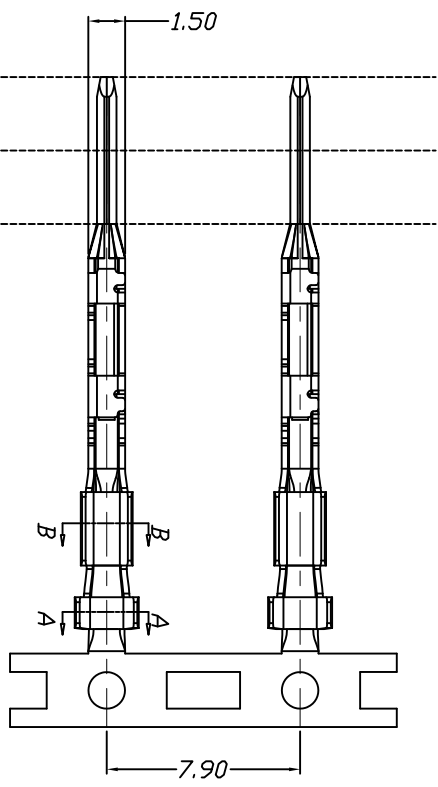


环保物料



Specification技术规范:

Voltage Rating 额定电压:250V AC/DC
Current Rating 额定电流: 3A AC/DC
Withand Voltage 耐电压: 1000V AC/Minute
Contact Resistance 接触电阻:30mΩ(MAX.)
Insulation Resistance 绝缘电阻:-----
Temperature Range 工作温度: -40℃~+120℃
Plating 电镀: Bright Tin over Nickel 底层镀镍,
Ni 镍: 50-80uminch



Wire Range	Insulation O.D.	Material	Finish	Qty/reel
AWG #22~#28	1.0mm(max)	C5191	Au/Sn-plated	7500 pcs

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.4	X° REF±3°
0.00±0.3	X° ±2°
0.000±0.2	X° X'±1°

SCALE: 1:1	NAME	DATE
APPROVED		
DESIGNER		

康 孚 新 能 源

网址: www.dgpcn.com 电话: 0789-85337883

邮箱: 2850175988@qq.com 传真: 0789-85392827

PART. NO:	32206TOP-**
DWG. NO:	

REV.	REVISION RECORD	DATE	SIZE:	UNIT:	MM	0.00±0.3	X° ±2°	X° X'±1°	DRAWN	肖坤权	2023.01.04	TITLE:	PH2.20MM L: 22.60MM 磷铜镀	REV:	A1	SHEET:	1/1
A1	增加力臂结构	2023.01.04															
A0	新图面发行	2017.06.16															

1	2	3	4	5	6	7	8
H							
G							
F							
E							
D							
C							
B							
A							