
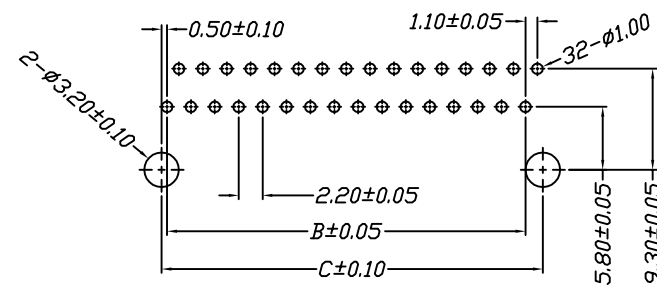
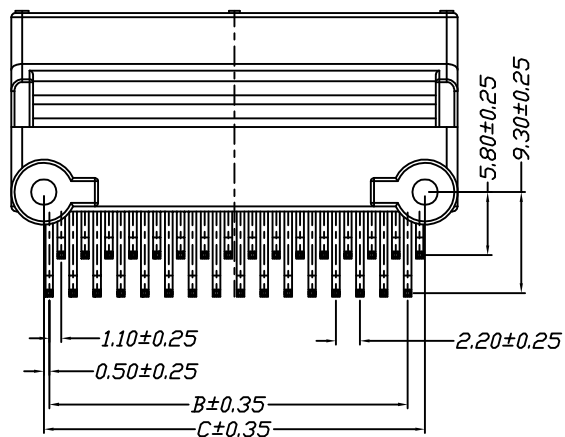
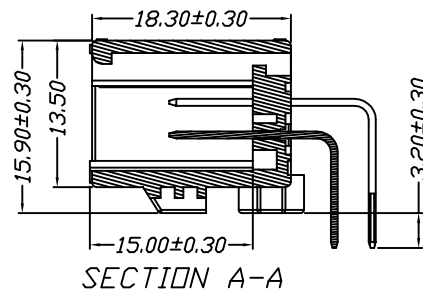


环保物料

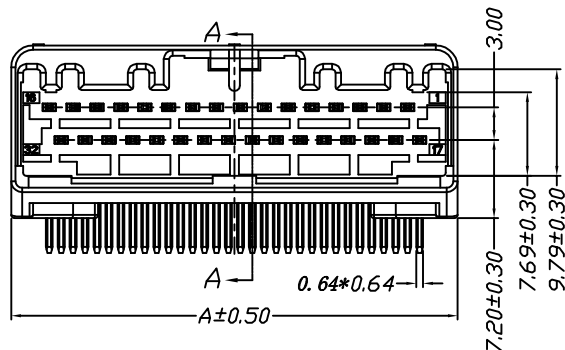

P.C.B. LAYOUT

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 3A AC,DC
Withstand Voltage : 650V AC/minute
Contact Resistance : 30mΩ(MAX.)
Insulation Resistance : 100MΩ(MIN.)
Temperature Range : -40°C~+85°C

Part No	Dimensions		
	A	B	C
2*6P	19.10	11.00	13.10
2*8P	23.50	15.40	17.50
2*10P	27.90	19.80	21.90
2*12P	32.30	24.20	26.30
2*14P	36.70	28.60	30.70
2*16P	41.10	33.00	35.10
2*18P	45.50	37.40	39.50
2*20P	49.90	41.80	43.90

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°	APPROVED	黎腾	2017.06.16
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16



康导新能源

网址: www.dgoonne.com 电话: 0769-85337763
邮箱: 2850175888@qq.com 传真: 0769-85382282

TITLE:
2.20mm pitch Dual Wafer

PART. NO:	42202W90-2*NP*-A1-**	
DWG. NO:	ENDE05	
REV:	A0	SHEET: 1/1