
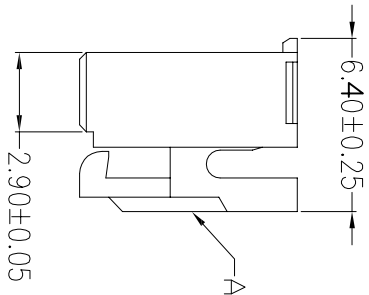
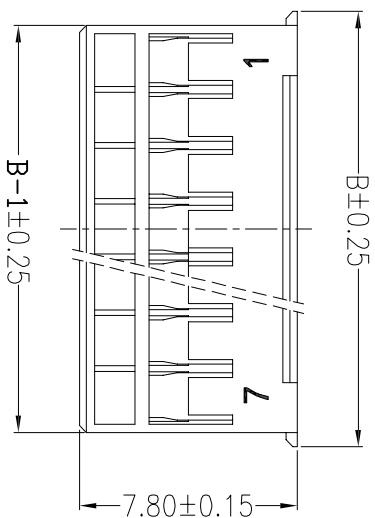
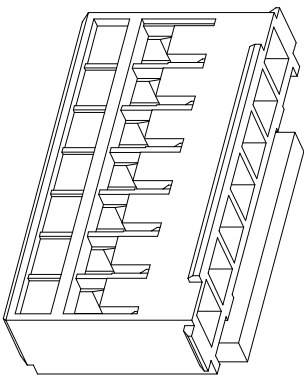


环保物料

主要技术参数 Main Specifications

线数 (Poles) : 02 to 18
 接触电阻 (Contact resistance): $\leq 30m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$

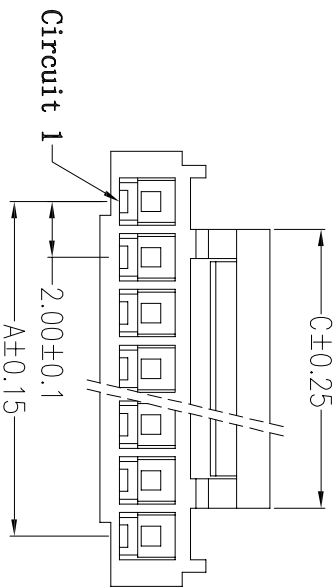

Circuits	Dimensions(mm)		
	A	B	C
02	2.00	5.60	3.20
03	4.00	7.60	4.00
04	6.00	9.60	5.00
05	8.00	11.60	6.00
06	10.00	13.60	8.00
07	12.00	15.60	10.00
08	14.00	17.60	12.00
09	16.00	19.60	14.00
10	18.00	21.60	16.00
11	20.00	23.60	14.00
12	22.00	25.60	16.00
13	24.00	27.60	16.00
14	26.00	29.60	16.00
15	28.00	31.60	16.00
16	30.00	33.60	16.00
17	32.00	35.60	16.00
18	34.00	37.60	16.00

ITEM	A	HOUSING COMPONENT	1 PCS	PA66	COLOR:
			QTY	MATERIAL	FINISH

GENERAL TOLERANCES

L INEAR

ANGLES

0.0 ± 0.35

$X^{\circ} REF \pm 6^{\circ}$

0.00 ± 0.25

$X^{\circ} \pm 3^{\circ}$

0.000 ± 0.15

SCALE: 1:1

APPROVED

DESIGNER

NAME

DATE

DATE

DATE

DATE



TITLE: 2.00mm PITCH HOUSING

PART. NO: 22011Y

DMG. NO:

REV: A0 SHEET: 1/1

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	SCALE: 1:1	NAME	DATE	TITLE:	REV:	SHEET:
A0	新图面发行	2017.06.16	MM	A4	1:1	黎腾	2017.06.16	2.00mm PITCH HOUSING	A0	1/1
1	REVISION RECORD					肖坤权	2017.06.16			