
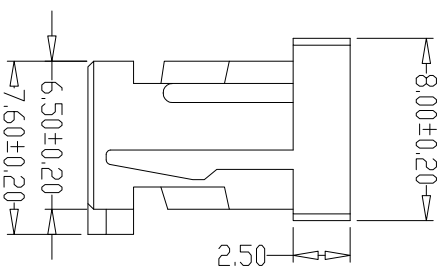
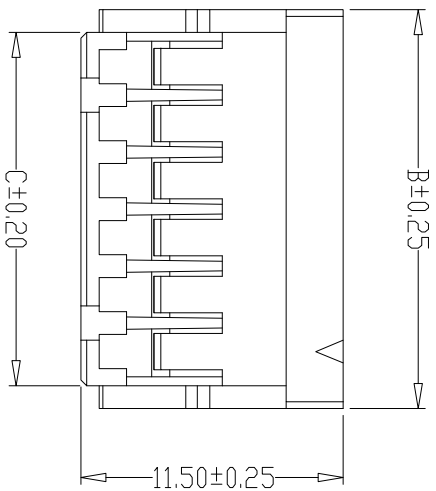


环保物料

1 2 3 4 5 6 7 8

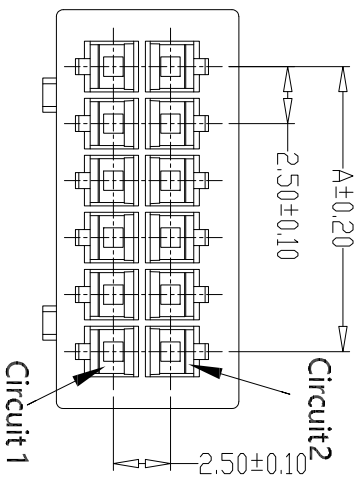

主要技术参数 Main Specifications

线数 (Poles) : 08~40
 接触电阻 (Contact resistance) : $\leq 30m\Omega$
 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
 额定电压 (Rated voltage) : 250V AC DC
 额定电流 (Rated current) : 3.0A AC DC
 耐电压 (Withstand Voltage) : 800V AC/minute
 温度范围 (Temperature Range) : $-25^{\circ}C \sim +85^{\circ}C$

PIN	尺寸 (mm)		
	A	B	C
2*02Y	2.50	7.50	5.50
2*03Y	5.00	10.00	8.00
2*04Y	7.50	12.50	10.50
2*05Y	10.00	15.00	13.00
2*06Y	12.50	17.50	15.50
2*07Y	15.00	20.00	18.00
2*08Y	17.50	22.50	20.50
2*09Y	20.00	25.00	23.00
2*10Y	22.50	27.50	25.50
2*11Y	25.00	30.00	28.00
2*12Y	27.50	32.50	30.50
2*13Y	30.00	35.00	33.00
2*14Y	32.50	37.50	35.50
2*15Y	35.00	40.00	38.00
2*16Y	37.50	42.50	40.50
2*17Y	40.00	45.00	43.00
2*18Y	42.50	47.50	45.50
2*19Y	45.00	50.00	48.00
2*20Y	47.50	52.50	50.50

A	HOUSING	1	PCS	PAGE	COLOR:WHITE
ITEM	COMPONENT	QTY	MATERIAL	FINISH	

GENERAL TOLERANCES

SCALE: 1:1

NAME: 黎腾
DATE: 2017.06.16

PART NO: 22508Y

LINEAR: 0.0±0.35
ANGLES: X° REF±6°

APPROVED: 肖坤权
DESIGNER: 肖坤权

DATE: 2017.06.16

TITLE: 2.50mm PITCH HOUSING

DWG. NO: REV: A0 SHEET: 1/1

UNIT: MM
SIZE: A4
0.00±0.25
X° ±3°
X° X'±2°

DRAWN: 肖坤权

DATE: 2017.06.16

REVISION RECORD

REV: A0 SHEET: 1/1

1 2 3 4 5 6 7 8