



环保物料

| Pin数 | 尺寸A | 尺寸B | 尺寸C |
|------|-------|-------|-------|
| 2x3 | 5.08 | 12.94 | 15.24 |
| 2x4 | 7.62 | 15.48 | 17.78 |
| 2x5 | 10.16 | 18.02 | 20.32 |
| 2x6 | 12.70 | 20.56 | 22.86 |
| 2x7 | 15.24 | 23.10 | 25.40 |
| 2x8 | 17.78 | 25.64 | 27.94 |
| 2x9 | 20.32 | 28.18 | 30.48 |
| 2x10 | 22.86 | 30.72 | 33.02 |
| 2x11 | 25.40 | 33.26 | 35.56 |
| 2x12 | 27.94 | 35.80 | 38.10 |
| 2x13 | 30.48 | 38.34 | 40.64 |
| 2x14 | 33.02 | 40.88 | 43.18 |
| 2x15 | 35.56 | 43.42 | 45.72 |
| 2x16 | 38.10 | 45.96 | 48.26 |
| 2x17 | 40.64 | 48.50 | 50.80 |
| 2x18 | 43.18 | 51.04 | 53.34 |
| 2x19 | 45.72 | 53.58 | 55.88 |
| 2x20 | 48.26 | 56.12 | 58.42 |
| 2x21 | 50.80 | 58.66 | 60.96 |
| 2x22 | 53.34 | 61.20 | 63.50 |
| 2x23 | 55.88 | 63.74 | 66.04 |
| 2x24 | 58.42 | 66.28 | 68.58 |
| 2x25 | 60.96 | 68.82 | 71.12 |
| 2x26 | 63.50 | 71.36 | 73.66 |
| 2x27 | 66.04 | 73.90 | 76.20 |
| 2x28 | 68.58 | 76.44 | 78.74 |
| 2x29 | 71.12 | 78.98 | 81.28 |
| 2x30 | 73.66 | 81.52 | 83.82 |
| 2x31 | 76.20 | 84.06 | 86.36 |
| 2x32 | 78.74 | 86.60 | 88.90 |

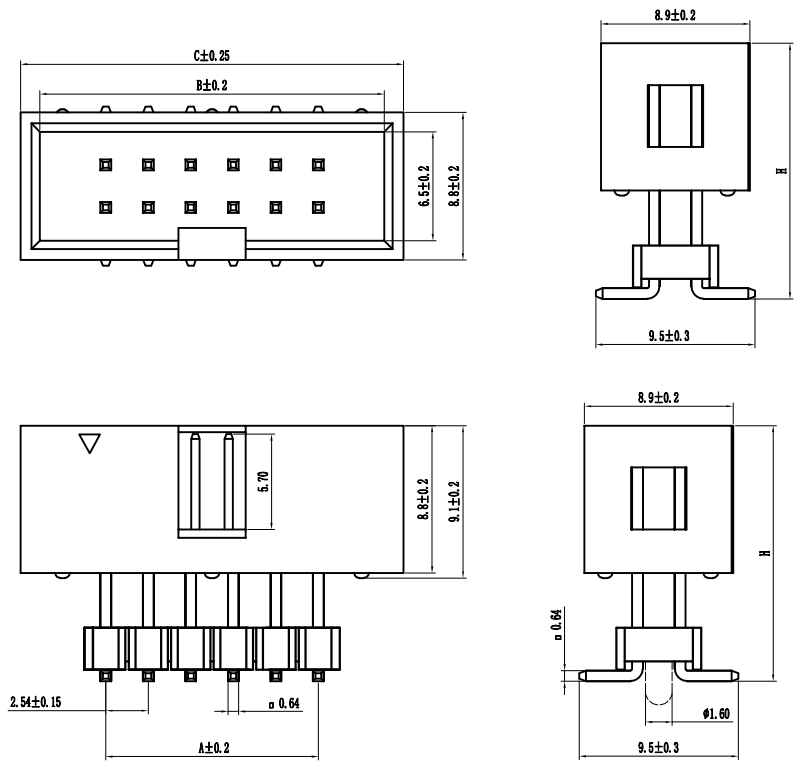

PCB LAYOUT

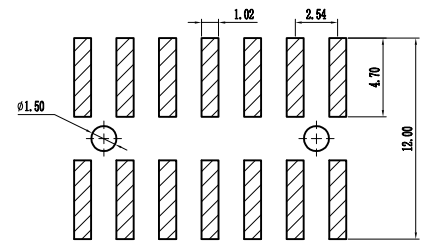

Specification:
 Current Rating : 3AMP
 Temperature Range : -40℃to+105℃
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 1000V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

| B 25 9S-XXX X X-XX-X-XXX | | | | |
|---|---|---|--|--|
| ① | ② | ③ | ④ | ⑤ |
| ① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header | ② Pitch: 08-0.80 10-1.00 12-1.27 20-2.00 25-2.54 39-3.96 50-5.08 | ③ Tail/Mounting Style: 90-Right Angle DIP Type 9S-Straight SMT Type 0D-Straight DIP Type 0S-Horizontal SMT Type | ④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin 140=1*40pin 240=2*40pin | ⑤ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue |
| ⑥ Material Type: A-PBT B-PA46 C-PA6T D-PA6T E-LCP | ⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" ! 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u" | ⑧ RoHS Request: 0:No Request 1:RoHS 2:HF (Halogen Free) | ⑨ Customer Code | |

| GENERAL TOLERANCES | | SCALE: | NAME | DATE |
|--------------------|-----------|----------|------|------------|
| LINEAR | ANGLES | 1:1 | 黎腾 | 2017.06.16 |
| 0.00±0.15 | X° REF±6° | APPROVED | 肖坤权 | 2017.06.16 |
| 0.000±0.08 | X° X'±2° | DESIGNER | 旷淇 | 2017.06.16 |
| | | DRAWN | | |

康导新能源
 网址: www.dgconne.com 电话: 0769-85337633
 邮箱: 2850175988@qq.com 传真: 0769-85392827

TITLE:
 Pitch2.54mm Box Header, Dual Row,
 Plastic Height 8.8mm, Elevator SMT (with Local Peg) Type

| |
|------------------------|
| PART. NO: KDBH-0028 |
| DWG. NO: ENDE2028 |
| REV: A0 SHEET: 1/1 |

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A