



环保物料

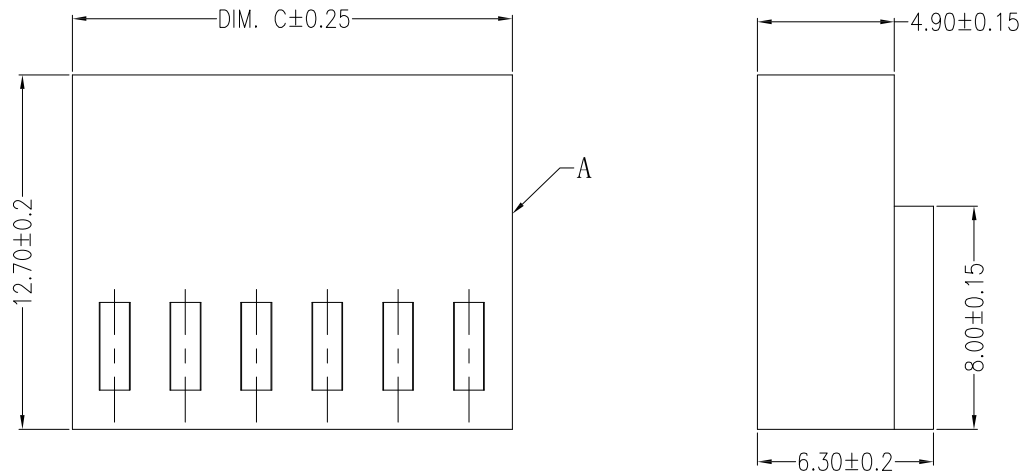

主要技术参数 Main Specifications

线数 (Poles): 02 to 20
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 2.5A AC DC
 耐电压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

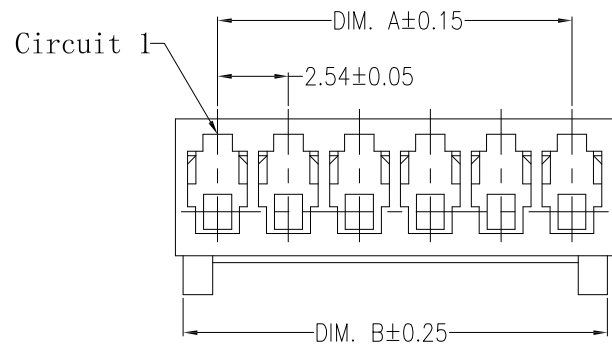

Circuits	Dimensions(mm)		
	DIM. A	DIM. B	DIM. C
02	2.54	3.04	5.68
03	5.08	5.58	8.22
04	7.62	8.12	10.76
05	10.16	10.66	13.30
06	12.70	13.20	15.84
07	15.24	15.74	18.38
08	17.78	18.28	20.92
09	30.32	20.82	23.46
10	22.86	23.36	26.00
11	25.40	25.90	28.54
12	27.94	28.44	31.08
13	30.84	30.98	33.62
14	33.02	33.52	36.16
15	35.56	36.06	38.70
16	38.10	38.60	41.24
17	40.64	41.14	43.78
18	43.18	43.68	46.32
19	45.72	46.22	48.86
20	48.26	48.76	51.40

A	HOUSING	1 PCS	PA66	COLOR:WHITE
ITFM	COMPONENT	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	
LINER	ANGLES	APPROVED	黎腾	2017.06.16	
0.0 ± 0.35	X° REF ± 6°	DESIGNER	肖坤权	2017.06.16	
0.00 ± 0.25	X° ± 3°	DRAWN	旷淇	2017.06.16	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 ± 0.15	X° X' ± 2°



PART. NO:	22543Y	
DWG. NO:		
REV:	A0	SHEET: 1/1