
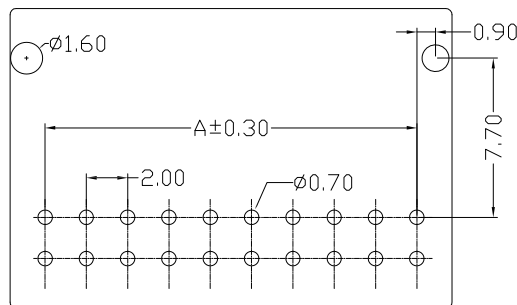



环保物料

主要技术参数 Main Specifications


线 数 (Poles): 08 to 40
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐 电 压 (Withstand Voltage): 800V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

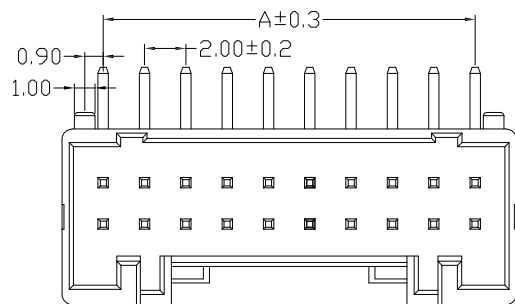


P.C.B LAYOUT






8P~10P



12P~18P



20P~40P

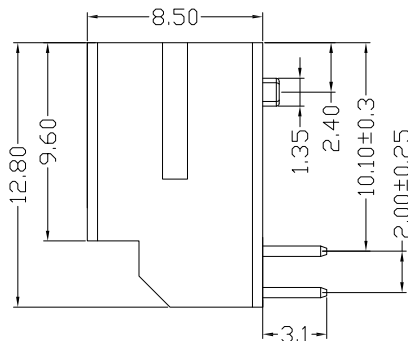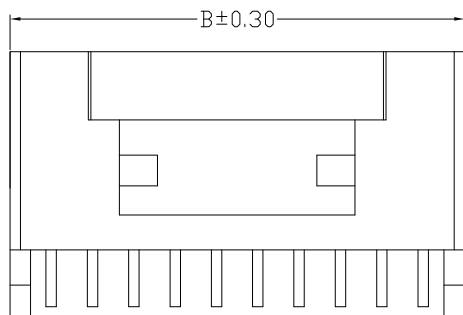

8P~10P Without Guideway
 12P~40P With Guideway
 Scale:1/0.4

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*04	6.00	10.00	2*13	24.00	28.00
2*05	8.00	12.00	2*14	26.00	30.00
2*06	10.00	14.00	2*15	28.00	32.00
2*07	12.00	16.00	2*16	30.00	34.00
2*08	14.00	18.00	2*17	32.00	36.00
2*09	16.00	20.00	2*18	34.00	38.00
2*10	18.00	22.00	2*19	36.00	40.00
2*11	20.00	24.00	2*20	38.00	42.00
2*12	22.00	26.00			

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
B	CONTACT	n PCS	Brass	Sn-plated
A	HOUSING	1 PCS	PA66 Natural	UL 94V-0

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	MM	0.00±0.25	X° ±3°		肖坤权	2017.06.16
	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°		旷淇	2017.06.16

康 导 新 能 源
 网址: www.dgoonns.com 电话: 0769-85337633
 邮箱: 2850175988@qq.com 传真: 0769-85392827

PART. NO:	22006AW	
DWG. NO:		
REV:	A0	SHEET: 1/1