
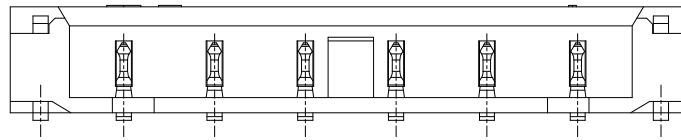
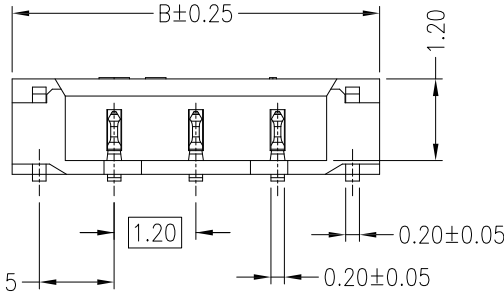
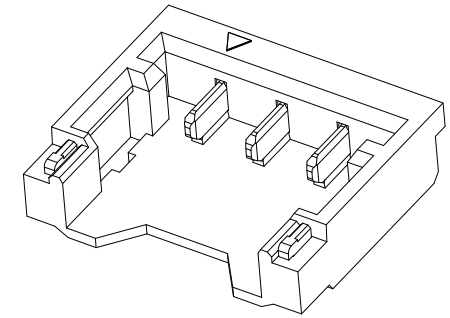
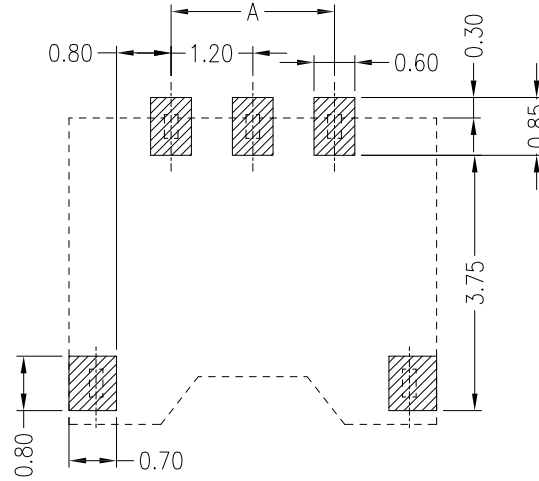




环保物料

Specifications:

Poles: 02~10  
 Contact resistance:  $\leq 20m\Omega$   
 Insulation resistance:  $\geq 100M\Omega$   
 Rated voltage: 50V AC DC  
 Rated current: 2.0A AC DC  
 Withstand Voltage: 500V AC/minute  
 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$   
 Housing: PA9T UL94V-0, Black  
 Contacts: Phosphor Bronze Matte Sn/Gold  
 Solder Tabs: Brass Matte Sn

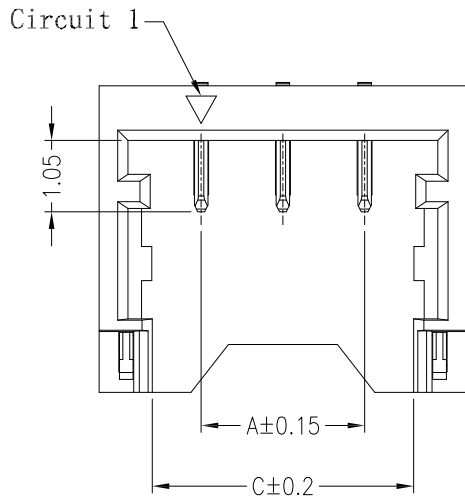


6P With Sticking Point

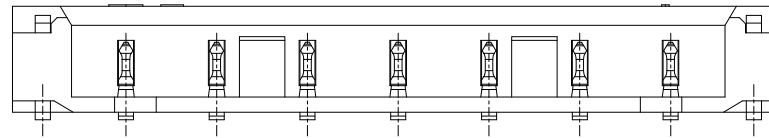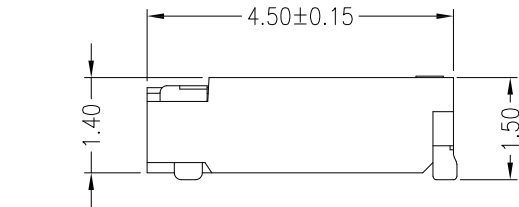

7P~10P With Sticking Point

Circuits	Dimensions (mm)		
	A	B	C
02	1.20	4.20	2.64
03	2.40	5.40	3.84
04	3.60	6.60	5.04
05	4.80	7.80	6.24
06	6.00	9.00	7.44
07	7.20	10.20	8.64
08	8.40	11.40	9.84
09	9.60	12.60	11.04
10	10.80	13.80	12.24

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392827	PART. NO:	21201AWR	
				LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:		
A0		新图面发行		0.00±0.25	X° ±3°	DESIGNER	肖坤权	2017.06.16		TITLE:	1.2mmPITCH 90° WAFER SMT TYPE	
REV.	REVISION RECORD		DATE	SIZE: A4	X° X'±2°	DRAWN	旷淇	2017.06.16		REV:	A0	SHEET: