
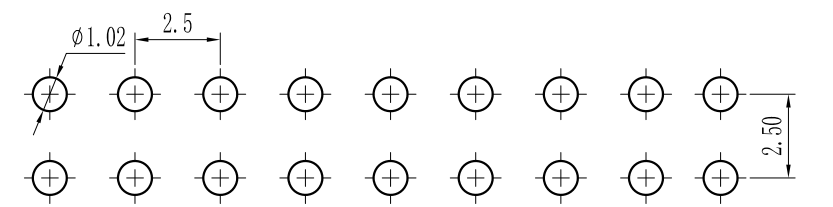
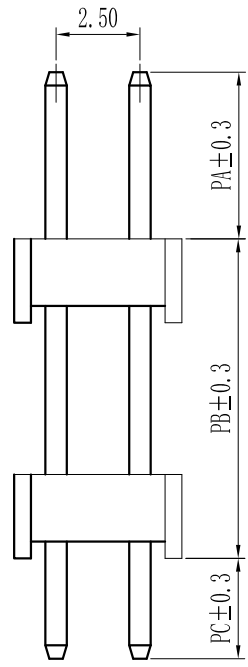
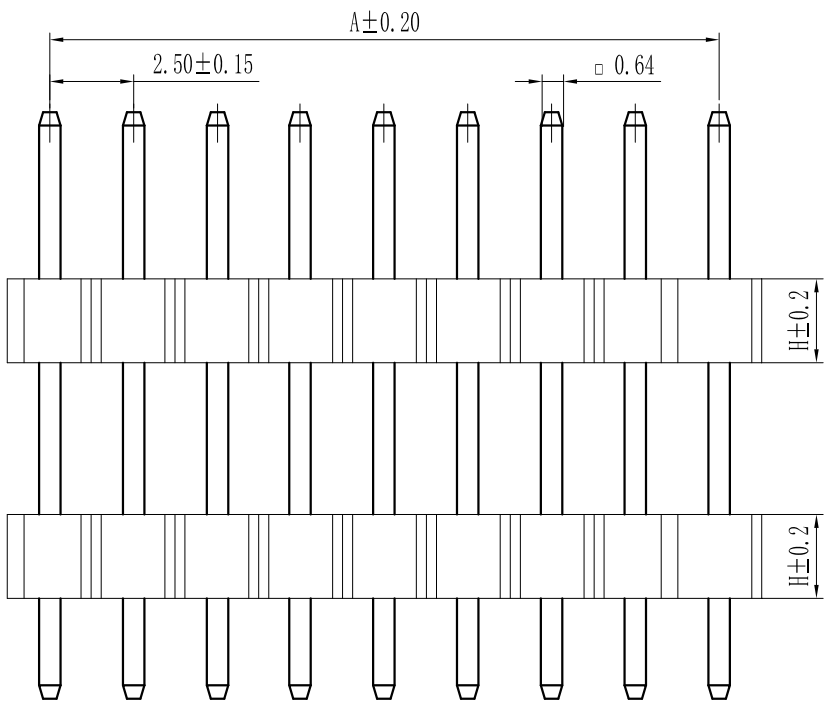


	1	2	3	4	5	6	7	8
A	ROHS		For reference only Specification: Current Rating : 3.0AMP Temperature Range : -40℃to+105℃ Contact Resistance : 20mΩ Max Insulation Resistance : 1000MΩ Min Withstanding Voltage : AC 500V Material: Insulator : Polyester (UL94V-0) Standard:PBT/PA6T/LCP Contact: Brass Plating : Au or Sn Over 50u" Ni					
B								
C								
D								
E								
F								
G								
H								

ROHS

Pin数	尺寸A	尺寸B
2×1	-	2.50
2×2	2.50	5.00
2×3	5.00	7.50
2×4	7.50	10.00
2×5	10.00	12.50
2×6	12.50	15.00
2×7	15.00	17.50
2×8	17.50	20.00
2×9	20.00	22.50
2×10	22.50	25.00
2×11	25.00	27.50
2×12	27.50	30.00
2×13	30.00	32.50
2×14	32.50	35.00
2×15	35.00	37.50
2×16	37.50	40.00
2×17	40.00	42.50
2×18	42.50	45.00
2×19	45.00	47.50
2×20	47.50	50.00
2×21	50.00	52.50
2×22	52.50	55.00
2×23	55.00	57.50
2×24	57.50	60.00
2×25	60.00	62.50
2×26	62.50	65.00
2×27	65.00	67.50
2×28	67.50	70.00
2×29	70.00	72.50
2×30	72.50	75.00
2×31	75.00	77.50
2×32	77.50	80.00
2×33	80.00	82.50
2×34	82.50	85.00
2×35	85.00	87.50
2×36	87.50	90.00
2×37	90.00	92.50
2×38	92.50	95.00
2×39	95.00	97.50
2×40	97.50	100.00

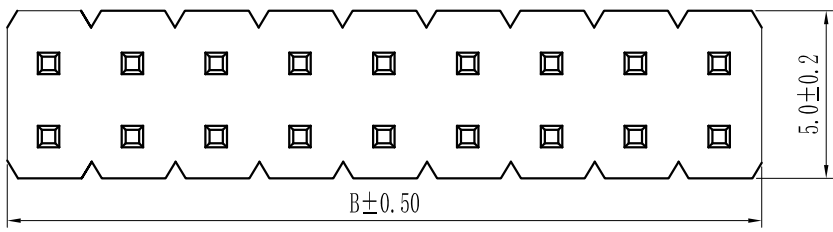

PCB LAYOUT

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES	APPROVED		
				0.0±0.25	X° REF±6°	DESIGNER		
				UNIT: MM	0.00±0.15	X° ±3°		
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	

网址: www.dgonne.com 电话: 0769-85337633
邮箱: 2850175888@qq.com 传真: 0769-85352827

TITLE:
Pitch2.50mm Pin Header, Dual Plastic,
Dual Row, DIP

PART. NO: KDPH-0079	
DWG. NO: ENDE0079	
REV: A0	SHEET: 1/1