

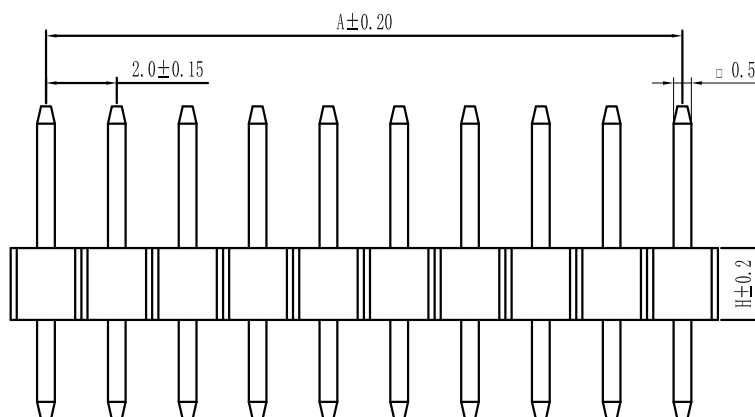


ROHS

For reference only

Pin数	尺寸A	尺寸B
1X1	2.0	2.0
1X2	2.0	4.0
1X3	4.0	6.0
1X4	6.0	8.0
1X5	8.0	10.0
1X6	10.0	12.0
1X7	12.0	14.0
1X8	14.0	16.0
1X9	16.0	18.0
1X10	18.0	20.0
1X11	20.0	22.0
1X12	22.0	24.0
1X13	24.0	26.0
1X14	26.0	28.0
1X15	28.0	30.0
1X16	30.0	32.0
1X17	32.0	34.0
1X18	34.0	36.0
1X19	36.0	38.0
1X20	38.0	40.0
1X21	40.0	42.0
1X22	42.0	44.0
1X23	44.0	46.0
1X24	46.0	48.0
1X25	48.0	50.0
1X26	50.0	52.0
1X27	52.0	54.0
1X28	54.0	56.0
1X29	56.0	58.0
1X30	58.0	60.0
1X31	60.0	62.0
1X32	62.0	64.0
1X33	64.0	66.0
1X34	66.0	68.0
1X35	68.0	70.0
1X36	70.0	72.0
1X37	72.0	74.0
1X38	74.0	76.0
1X39	76.0	78.0
1X40	78.0	80.0

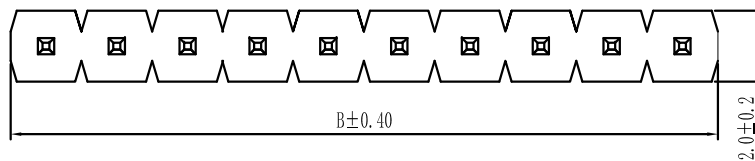

Specification:

Current Rating : 2AMP

Temperature Range : -40°C to +105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000M Ω Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PBT/PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni


Height

H=1.0mm、1.5mm、2.0mm、3.0mm

P 20 0D-XXX X X-XX-X-XXX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:		⑤ Insulator Color:
P=Pin Header	08=0.80	90=Right Angle DIP Type	Single Row	Double Row	A:Black B:Brown C:Red
F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin	201=2*1Pin	D:Orange E:Yellow F:Green
B=Box Header	12=1.27	00=Straight DIP Type	102=1*2Pin	202=2*2Pin	G:Blue H:Violet J:Gray
E=Ejector Header	20=2.00	0S=Horizontal SMT Type	110=1*10Pin	210=2*10Pin	K:White P:Light Blue
	25=2.54		140=1*40Pin	240=2*40Pin	

① Material Type:	⑦ Plating Type:	③ RoHS Request:	② Customer Code
A-PBT	08-Sn-Au 18-Xi 28-Sn 38-Matte-Tin 58-Au	0:No Request	
B-PA46	0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS	
C-PA67	0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)	
D-PA97	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"		
E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" : 0F-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"		



				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgconn.com 电话: 0768-86337833 邮箱: 2850175888@qq.com 传真: 0768-86362627	PART. NO: KDPH-0046	
				LINEAR	ANGLES	APPROVED					
				0.0±0.25	X° REF±6°	DESIGNER				REV: A0	SHEET: 1/1
				UNIT: MM	0.00±0.15	X° ±3°					
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN			TITLE: Pitch2.00mm Pin Header,Single Plastic, Single Row,DIP		