


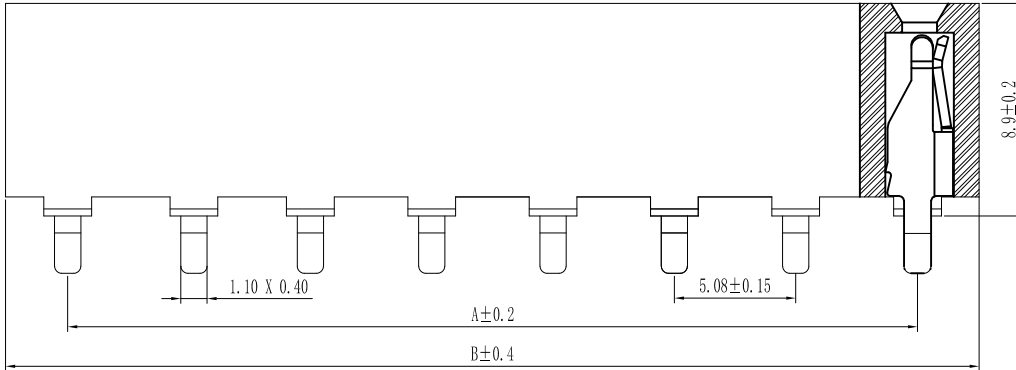


环保物料

Pin数	尺寸A	尺寸B
1×2	5.08	10.16
1×3	10.16	15.24
1×4	15.24	20.32
1×5	20.32	25.40
1×6	25.40	30.48
1×7	30.48	35.56
1×8	35.56	40.64
1×9	40.64	45.72
1×10	45.72	50.80
1×11	50.80	55.88
1×12	55.88	60.96
1×13	60.96	66.04
1×14	66.04	71.12
1×15	71.12	76.20
1×16	76.20	81.28
1×17	81.28	86.36
1×18	86.36	91.44
1×19	91.44	96.52
1×20	96.52	101.60
1×21	101.60	106.68
1×22	106.68	111.76
1×23	111.76	116.84
1×24	116.84	121.92
1×25	121.92	127.00
1×26	127.00	132.08
1×27	132.08	137.16
1×28	137.16	142.24
1×29	142.24	147.32
1×30	147.32	152.40
1×31	152.40	157.48
1×32	157.48	162.56
1×33	162.56	167.64
1×34	167.64	172.72
1×35	172.72	177.80
1×36	177.80	182.88
1×37	182.88	187.96
1×38	187.96	193.04
1×39	193.04	198.12
1×40	198.12	203.20



Specification:
Current Rating : 7AMP
Temperature Range : -40℃to+105℃
Contact Resistance : 20mΩ Max
Insulation Resistance : 1000MΩ Min
Withstanding Voltage : AC 500V
Material:
Insulator : Polyester (UL94V-0)
Standard:PBT/PA6T/LCP
Contact: Bronze
Plating : Au or Sn Over 50u" Ni

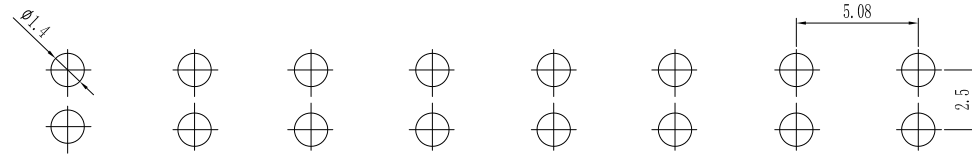

PCB LAYOUT

F 50 0D-XXX X X-XX-X-XXX							
①	②	③	④	⑤	⑥	⑦	⑧
① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:	⑤ Insulator Color:			
P=Pin Header	08=0.80	9D=Right Angle DIP Type	Single Row Double Row	A:Black B:Brown C:Red			
F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin 201=2*1Pin	D:Orange E:Yellow F:Green			
B=Box Header	12=1.27	0D=Straight DIP Type	102=1*2Pin 202=2*2Pin	G:Blue H:Violet J:Gray			
E=Ejector Header	20=2.00	0S=Horizontal SMT Type	11=1*1Pin 21=2*1Pin	K:White P:Light Blue			
	25=2.54		140=1*40pin 240=2*40pin				
	39=3.96						
	50=5.08						
① Material Type:	⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code				
A=PBT	0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au	0:No Request					
B-PA66	0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS					
C-PA6T	0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)					
D-PA9T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"						
E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u"						
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"						

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850175966@qq.com 传真: 0769-85392627	PART. NO: KDFH-0215		
				LINEAR	ANGLES					APPROVED	黎腾	2017. 06. 16
				0. 0±0. 25	X° REF±6°	DESIGNER	肖坤权	2017. 06. 16				
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00±0. 15	X° ±3°	DRAWN	旷淇	2017. 06. 16		TITLE: Pitch5.08mm Female Header,Single Row, Plastic Height 8.9mm,DIP(U)		
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°							