
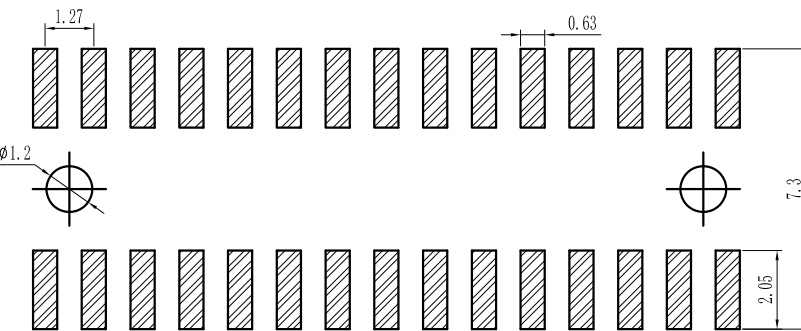
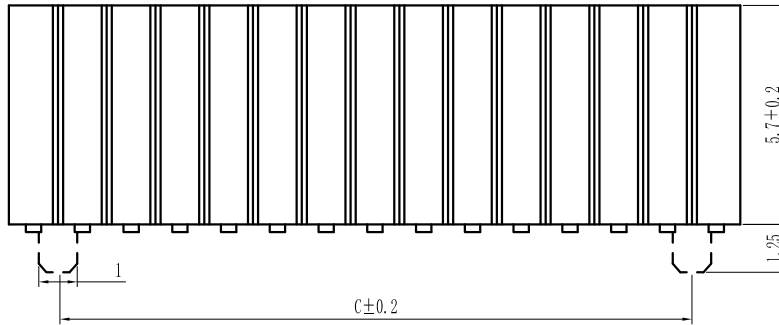


环保物料

Pin数	尺寸A	尺寸B	尺寸C
2×2	1.27	2.94	0.00
2×3	2.54	4.21	1.27
2×4	3.81	5.48	2.54
2×5	5.08	6.75	3.81
2×6	6.35	8.02	5.08
2×7	7.62	9.29	6.35
2×8	8.89	10.56	7.62
2×9	10.16	11.83	8.89
2×10	11.43	13.10	10.16
2×11	12.70	14.37	11.43
2×12	13.97	15.64	12.70
2×13	15.24	16.91	13.97
2×14	16.51	18.18	15.24
2×15	17.78	19.45	16.51
2×16	19.05	20.72	17.78
2×17	20.32	21.99	19.05
2×18	21.59	23.26	20.32
2×19	22.86	24.53	21.59
2×20	24.13	25.80	22.86
2×21	25.40	27.07	24.13
2×22	26.67	28.34	25.40
2×23	27.94	29.61	26.67
2×24	29.21	30.88	27.94
2×25	30.48	32.15	29.21
2×26	31.75	33.42	30.48
2×27	33.02	34.69	31.75
2×28	34.29	35.96	33.02
2×29	35.56	37.23	34.29
2×30	36.83	38.50	35.56
2×31	38.10	39.77	36.83
2×32	39.37	41.04	38.10
2×33	40.64	42.31	39.37
2×34	41.91	43.58	40.64
2×35	43.18	44.85	41.91
2×36	44.45	46.12	43.18
2×37	45.72	47.39	44.45
2×38	46.99	48.66	45.72
2×39	48.26	49.93	46.99
2×40	49.53	51.20	48.26
2×41	50.80	52.47	49.53
2×42	52.07	53.74	50.80
2×43	53.34	55.01	52.07
2×44	54.61	56.28	53.34
2×45	55.88	57.55	54.61
2×46	57.15	58.82	55.88
2×47	58.42	60.09	57.15
2×48	59.69	61.36	58.42
2×49	60.96	62.63	59.69
2×50	62.23	63.90	60.96

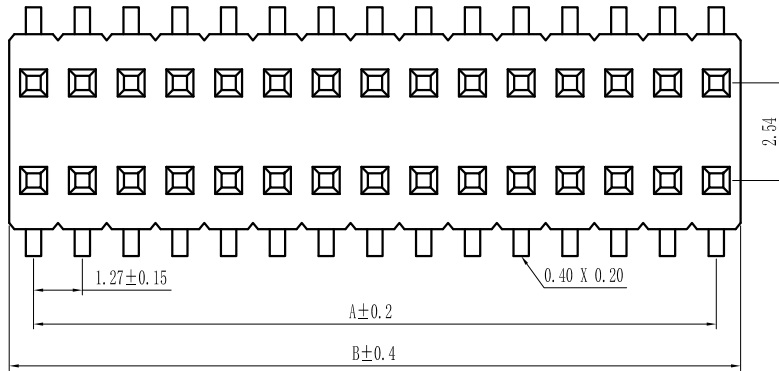

PCB LAYOUT

Specification:

Current Rating : 1AMP

Temperature Range : -40℃to+105℃

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PA6T/LCP

Contact: Bronze

Plating : Au or Sn Over 50u" Ni

F 12 9S-XXX X X-XX-X-XXX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail&Mounting Style: 90=Right Angle DIP Type 9S=Straight SMT Type 00=Straight DIP Type 0S=Horizontal SMT Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A-PBT B-PA46 C-PA6T D-PA9T E-LCP	⑦ Plating Type: 0*=Sn-Au 1*=Ni 2*=Sn 3*=Matte-Tin 5*=Au 0A=Sn-Au 1u" 0F=Sn-Au 10u" 5A=Au 1u" 0B=Sn-Au 2u" 0G=Sn-Au 15u" 5B=Au 2u" 0C=Sn-Au 3u" 0H=Sn-Au 30u" 5C=Au 3u" 0D=Sn-Au 4u" 0I=Sn-Au 40u" 5D=Sn-Au 4u" 0E=Sn-Au 5u" 0J=Sn-Au 50u" 5J=Sn-Au 50u"	⑧ RoHS Request: 0=No Request 1=RoHS 2=HF (Halogen Free)	⑨ Customer Code	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°	APPROVED	黎腾	2017.06.16
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16



康导新能源

网址: www.dgconne.com 电话: 0769-85337633
邮箱: 2850175986@qq.com 传真: 0769-85392827

TITLE:
1.27*2.54mm Female Header, Dual Row,
Plastic Height 5.7mm, SMT Type

PART. NO:	KDFH-0061
DWG. NO:	ENDE1061
REV:	A0
SHEET:	1/1