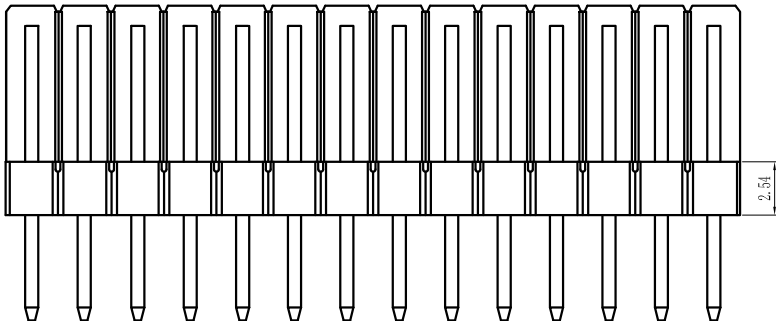
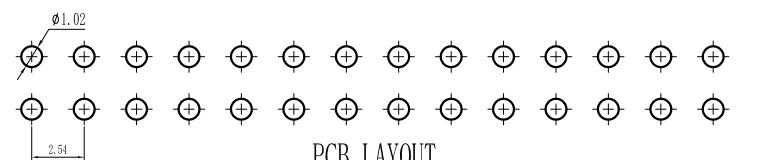


	1	2	3	4	5	6	7	8			
	ROHS		For reference only								
A	Pin数	尺寸A	尺寸B						Specification: Current Rating : 3.0AMP Temperature Range : -40℃to+105℃ Contact Resistance : 20mΩ Max Insulation Resistance : 1000MΩ Min Withstanding Voltage : AC 1000V Material: Insulator : Polyester (UL94V-0) Standard:PBT/PA6T/LCP Contact: Brass Plating : Au or Sn Over 50u" Ni		
	2×1	-	2.54								
	2×2	2.54	5.08								
	2×3	5.08	7.62								
	2×4	7.62	10.16								
	2×5	10.16	12.70								
B	2×6	12.70	15.24								
	2×7	15.24	17.78								
	2×8	17.78	20.32								
	2×9	20.32	22.86								
	2×10	22.86	25.40								
C	2×11	25.40	27.94								
	2×12	27.94	30.48								
	2×13	30.48	33.02								
	2×14	33.02	35.56								
	2×15	35.56	38.10								
	2×16	38.10	40.64								
	2×17	40.64	43.18								
D	2×18	43.18	45.72								
	2×19	45.72	48.26								
	2×20	48.26	50.80								
	2×21	50.80	53.34								
	2×22	53.34	55.88								
	2×23	55.88	58.42								
	2×24	58.42	60.96								
E	2×25	60.96	63.50								
	2×26	63.50	66.04								
	2×27	66.04	68.58								
	2×28	68.58	71.12								
	2×29	71.12	73.66								
	2×30	73.66	76.20								
F	2×31	76.20	78.74								
	2×32	78.74	81.28								
	2×33	81.28	83.82								
	2×34	83.82	86.36								
	2×35	86.36	88.90								
	2×36	88.90	91.44								
	2×37	91.44	93.98								
	2×38	93.98	96.52								
	2×39	96.52	99.06								
G	2×40	99.06	101.60								
				PCB LAYOUT							
H	REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	康 导 新 能 源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175888@qq.com 传真: 0769-85382827		PART. NO: KDPH-0103	H
								TITLE: Pitch2.54mm Pin Header,Dual Plastic, Dual Row,Right Angle Type		DWG. NO: ENDE0103	
	1	2	3	4	5	6	7	8	REV: A0	SHEET: 1/1	