


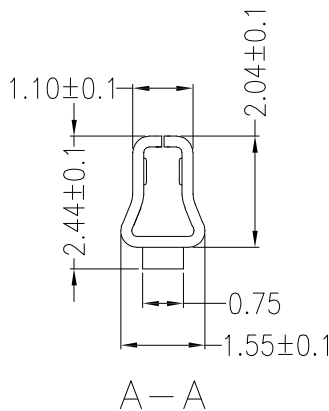
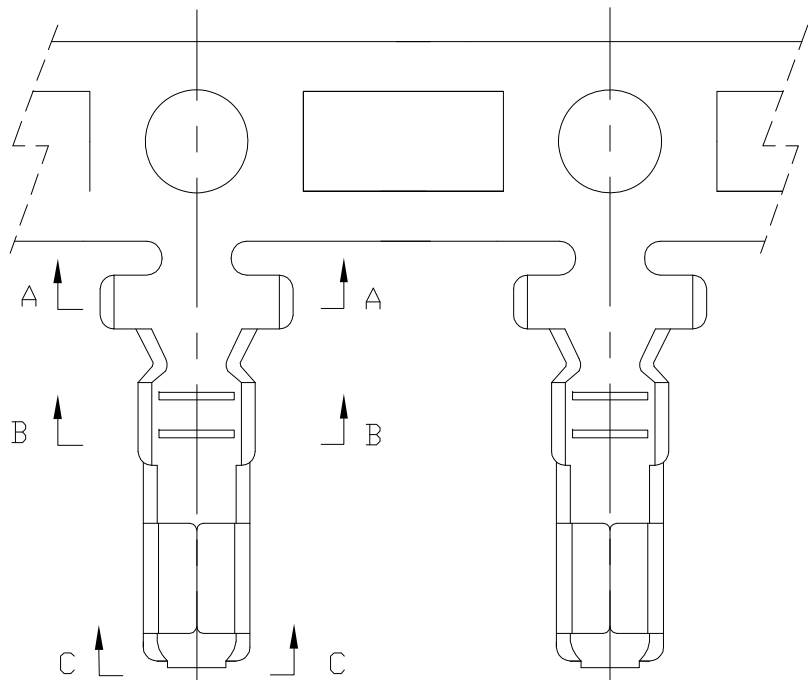


环保物料

主要技术参数 Main Specifications

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 150V AC DC
额定电流 (Rated current): 3.0A AC DC
耐电压 (Withstand Voltage): 500V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

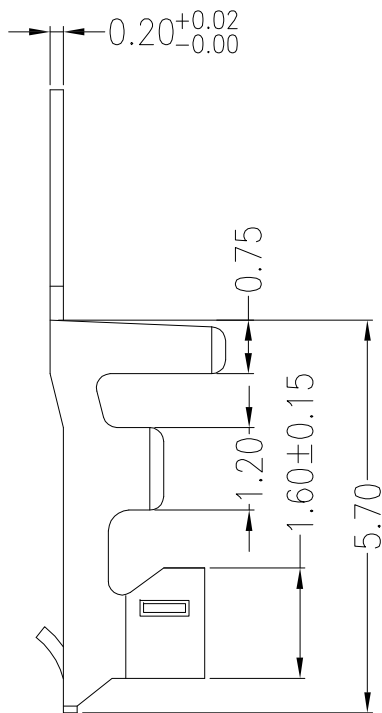

Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
AWG #22~#30	1.90mm(max)	Phosphor bronze	Tin-plated	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.35	X° REF±6°	APPROVED	黎腾	2017.06.16
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	旷淇	2017.06.16



康导新能源

网址: www.dgonne.com 电话: 0769-86337633
邮箱: 2850175988@qq.com 传真: 0769-86392827

PART. NO:
22504T

DWG. NO:

REV: A0 SHEET: 1/1

TITLE:
2.50mmPITCH TERMINAL