

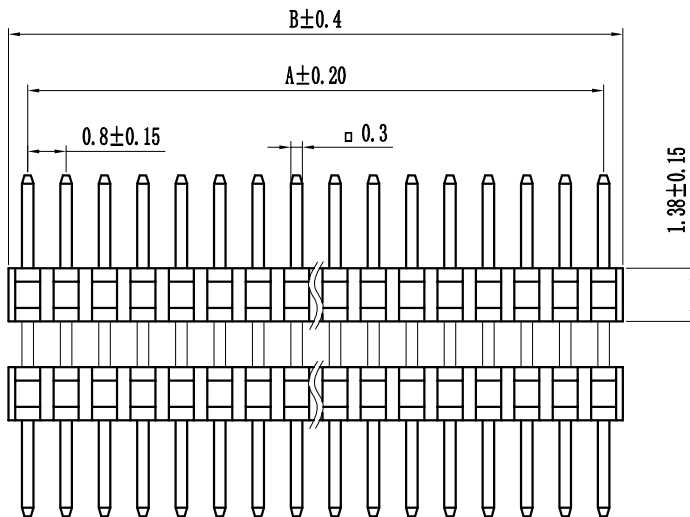


# 环保物料

Pin数	尺寸A	尺寸B
2X2	0.8	1.6
2X3	1.6	2.4
2X4	2.4	3.2
2X5	3.2	4.0
2X6	4.0	4.8
2X7	4.8	5.6
2X8	5.6	6.4
2X9	6.4	7.2
2X10	7.2	8.0
2X11	8.0	8.8
2X12	8.8	9.6
2X13	9.6	10.4
2X14	10.4	11.2
2X15	11.2	12.0
2X16	12.0	12.8
2X17	12.8	13.6
2X18	13.6	14.4
2X19	14.4	15.2
2X20	15.2	16.0
2X21	16.0	16.8
2X22	16.8	17.6
2X23	17.6	18.4
2X24	18.4	19.2
2X25	19.2	20.0
2X26	20.0	20.8
2X27	20.8	21.6
2X28	21.6	22.4
2X29	22.4	23.2
2X30	23.2	24.0
2X31	24.0	24.8
2X32	24.8	25.6
2X33	25.6	26.4
2X34	26.4	27.2
2X35	27.2	28.0
2X36	28.0	28.8
2X37	28.8	29.6
2X38	29.6	30.4
2X39	30.4	31.2
2X40	31.2	32.0
2X41	32.0	32.8
2X42	32.8	33.6
2X43	33.6	34.4
2X44	34.4	35.2
2X45	35.2	36.0
2X46	36.0	36.8
2X47	36.8	37.6
2X48	37.6	38.4
2X49	38.4	39.2
2X50	39.2	40.0



## PCB LAYOUT



### Specification:

Current Rating : 0.75AMP

Temperature Range : -40°Cto+105°C

Contact Resistance : 30mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

### Material:

Insulator : Polyester (UL94V-0)

Standard:PBT/PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni

**P 08 0D-XXX X X -XX-X-XXX**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail/Mounting Style: 9D=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=Horizontal SMT Type	④ No. of Pins: Single Row 101=1*1Pin 102=1*2Pin 140=1*40pin	⑤ Double Row 201=2*1Pin 202=2*2Pin 240=2*40pin	Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
---	---	---	---	---	--

⑥ Material Type: A-PBT B-PA46 C-PA6T D-PA9T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" : 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF (Halogen Free)	⑨ Customer Code
--	---	--	-----------------

GENERAL TOLERANCES		SCALE:	NAME	DATE
LINEAR	ANGLES	1:1	黎腾	2017.06.16
0.0±0.25	X° REF±6°	APPROVED	肖坤权	2017.06.16
0.00±0.15	X° ±3°	DESIGNER	旷淇	2017.06.16
0.000±0.08	X° X'±2°	DRAWN		

**康导新能源**  
 网址: www.dgconne.com 电话: 0769-85337633  
 邮箱: 2850175988@qq.com 传真: 0769-85392827

PART. NO:	KDPH-0004
DWG. NO:	ENDE0004
REV:	AO
SHEET:	1/1