

环保物料

A

B

C

D





E

F

G

H

Pin数	尺寸A	尺寸B
1×2	2.54	5.48
1×3	5.08	8.02
1×4	7.62	10.56
1×5	10.16	13.10
1×6	12.70	15.64
1×7	15.24	18.18
1×8	17.78	20.72
1×9	20.32	23.26
1×10	22.86	25.80
1×11	25.40	28.34
1×12	27.94	30.88
1×13	30.48	33.42
1×14	33.02	35.96
1×15	35.56	38.50
1×16	38.10	41.04
1×17	40.64	43.58
1×18	43.18	46.12
1×19	45.72	48.66
1×20	48.26	51.20
1×21	50.80	53.74
1×22	53.34	56.28
1×23	55.88	58.82
1×24	58.42	61.36
1×25	60.96	63.90
1×26	63.50	66.44
1×27	66.04	68.98
1×28	68.58	71.52
1×29	71.12	74.06
1×30	73.66	76.60
1×31	76.20	79.14
1×32	78.74	81.68
1×33	81.28	84.22
1×34	83.82	86.76
1×35	86.36	89.30
1×36	88.90	91.84
1×37	91.44	94.38
1×38	93.98	96.92
1×39	96.52	99.46
1×40	99.06	102.00

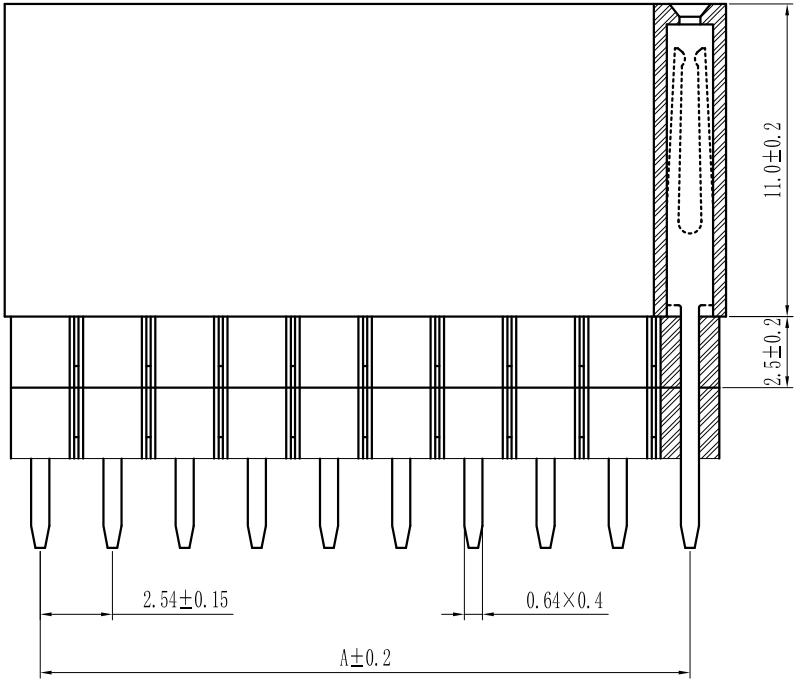

Specification:
 Current Rating : 3AMP
 Temperature Range : -40℃to+105℃
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 1000V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

F 25 0D-XXX X X-XX-X-XXX				
① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:	⑤ Insulator Color:
P=Pin Header	08=0.80	9D=Right Angle DIP Type	Single Row Double Row	A:Black B:Brown C:Red
F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin 201=2*1Pin	D:Orange E:Yellow F:Green
B=Box Header	12=1.27	0D=Straight DIP Type	102=1*2Pin 202=2*2Pin	G:Blue H:Violet J:Gray
E=Ejector Header	20=2.00	0S=horizontal SMT Type	111 111 111	K:White P:Light Blue
	25=2.54		140=1*40pin 240=2*40pin	
	39=3.96			
	50=5.08			
⑥ Material Type:	⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code	
A=PBT	0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au	0:No Request		
B-PA46	0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS		
C-PA6T	0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF(Halogen Free)		
D-PA9T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"			
E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u"			
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"			

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175966@qq.com 传真: 0769-85392827	PART. NO: KDFH-0207		
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO: ENDE1207		
				0. 0±0. 25	X° REF±6°	DESIGNER	肖坤权	2017. 06. 16			REV: A0	SHEET: 1/1
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00±0. 15	X° ±3°	DRAWN	旷淇	2017. 06. 16	TITLE: Pitch2.54mm Female Header,Single Row, Plastic Height (11.0+2.5+2.5)mm,DIP Type(Y)			
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°							

A

B

C

D

E

F

G

H